

Replacement Indications

Signs of wear and deterioration can indicate that it's time to replace your safety cabinet. But did you know that rust and other modifications can mean your cabinet no longer meets code? Modifications include:

- ✗ Welding I-bolts to assist with moving the cabinet
- ✗ Door doesn't close properly
- ✗ External attachments to dispense liquids
- ✗ Adding a padlock or drilling any hole in the cabinet
- ✗ Any venting added


Hazard Classifications

FLAMMABLE MATERIALS			COMBUSTIBLE MATERIALS		
Class IA	Class IB	Class IC	Class II	Class IIIA	Class IIIB
< 100° F Boiling Point	≥ 100° F Boiling Point	73°F (22°C) Flash Point	100°F (37.8°C) Flash Point	140°F (60°C) Flash Point	200°F (93°C) Flash Point
Diether Ether Pentane Ligroin Heptane Petroleum Ether	Acetone Benzene Cyclohexane Isopropyl Alcohol Methyl Ethyl Ketone Toluene Ethanol	Xylene Naphtha Turpentine	Camphor Oil Diesel Fuel Pine Tar	Aniline Benzaldehyde Butyl Cellosolve Nitrobenzene Pine Oil Formaldehyde	Animal Oils Vegetable Oils Ethylene Glycol Glycerin Lubricating Quenching Transformer Oils Triethanolamine Benzyl Alcohol Hydraulic Fluids

NOTE: Flammable and Combustible Liquids Code (NFPA 30) is published by the National Fire Protection Association (NFPA). Always check current code requirements for final selection; this is not a complete list. Liquid Classes may be found on product labels and Safety Data Sheet.

State Requirements

Self-Closing doors give you peace of mind that your team is protected, but did you know that some states and municipalities require self-closing doors?

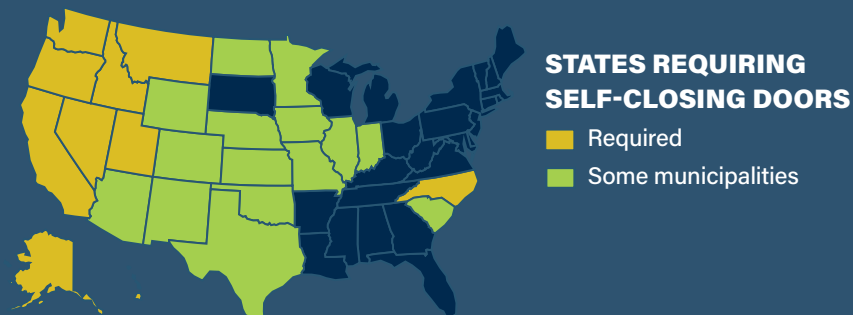

Ready to learn more?

Reach out today, and our team will be glad to assist you.

JamcoProducts.com | 800.748.8080 | sales@jamcoproducts.com | One Jamco Court, South Beloit IL 61080

myers™
INDUSTRIES

Jamco
Products